



**PREMIUM
QUALITY**

SPORTS POWER

**ABSORBED GLASS MAT
TECHNOLOGY**

*Advanced
generation
technology for
performance
and life!*

**Ideal for ATVs,
Motorcycles,
Personal Watercraft
& Snowmobiles**

The **Deka Sports Power AGM Battery** was designed for more than performance, it was designed for the enthusiast. Completely spillproof and leakproof; frequent replacement and high maintenance are over! The absorbed glass mat (AGM) technology increases power while improving rider and environmental safety. The key to this technology is the highly porous microfiber separators which completely absorb and trap the electrolyte. Molded top and side connection terminals provide versatility, increased strength and durability. The **Deka Sports Power AGM Battery** provides the most advanced power and value in the industry, so your customers can enjoy their leisure time, worry free.



WORRY FREE...

- No Vent tube
- No acid leaks to cause terminal corrosion
- Withstands damaging effects of vibration
- Environmentally friendly, 100% recyclable

MAINTENANCE FREE...

- No Filling
- No Activation
- Eliminates low water levels
- Low discharge rates for off season storage



QUALITY SYSTEM
CERTIFIED TO
ISO 9001
ISO/TS 16949
ISO 14001

Specifically Engineered for Demanding Sports Power Use!



SPORTS POWER

ABSORBED GLASS MAT TECHNOLOGY

Premium quality, specially designed Absorbed Glass Mat batteries are manufactured under strict quality controls to assure superior performance and long life. The AGM design allows easy installation without the worry of acid spills and damage to equipment.

FACTORY SEALED, VALVE-REGULATED, MAINTENANCE-FREE DESIGN
eliminates damage from acid spills and corrosion, environmentally safe.


HEAT SEALED COVER
eliminates electrolyte leakage and improves reliability.

MOLDED TOP AND SIDE CONNECTION TERMINAL DESIGN
provides ease of installation, increased strength and durability.

HEAVY-DUTY POSTS
resist vibration damage.

HEAVY TOP LEAD
improves plate-to-lug adhesion for vibration resistance, long life and performance.

CALCIUM POSITIVE AND NEGATIVE, FULL-FRAME POWER PATH GRIDS
provide the highest cranking amps and the lowest self-discharge rates for off season storage.

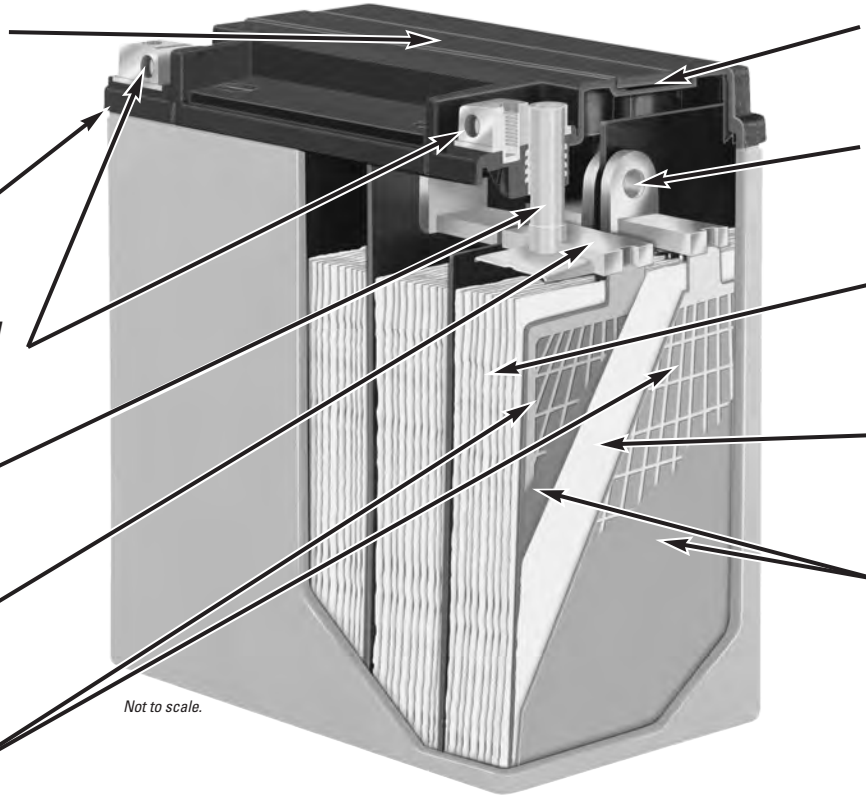

UNIQUE, LEAKPROOF PRESSURIZED VENT SYSTEM
is engineered for safety and long life. Retards dry-out.

LARGER THROUGH-PARTITION WELDS
increase power output, increases durability.

ABSORBED DEMINERALIZED ELECTROLYTE
improves service life and off-season storage.

TEAR-RESISTANT, ABSORBED GLASS MAT SEPARATORS
retain acid, protect plates, ensuring long life.

HIGH DENSITY OXIDE
provides maximum power-per-pound for dependable "high cycling" service.

POSITIVE TERMINAL CAP
(not shown) protects against short circuits and sparks during transport and storage.

STAINLESS STEEL TERMINAL BOLTS
(not shown) eliminate rust and corrosion.

PART NO.	FOOT-NOTES	CCA @ 0°F	10 AH Rating	APPROX. WT. lbs. kg	LENGTH in. mm	WIDTH in. mm	HEIGHT in. mm	Replaces these part numbers:	
ETX9	2,38,39	120	8	6.3 2.9	5 150	3 76	88	4 106	YTX9-BS
ETX12	2,38,39	180	10	9.4 4.3	5 150	3 76	88	5 130	YTX12-BS, YB12B-B2 (56)
ETX14	2,38,39,42,75,77	200	12	12.0 5.4	5 150	3 76	88	5 145	YTX14-BS, YTX16-BS, YTX16-BS-1, YB16B-A (56), YB16B-A1 (56)
ETX15	2,38,39,42,76	210	14	11.0 5.0	5 134	3 2	90	6 166	YB14-A2, YB14-B2, YB14A-A1, YB14A-A2
ETX15L	2,38,39	210	14	11.0 5.0	5 134	3 2	90	6 166	YB14L-A1, YB14L-A2, YB14L-B2, 12N14-3A, SYB14L-A2 (65), SYB14L-B2 (65)
ETX16	2,38,39,42,74,77	275	19	17.0 7.7	6 175	4	100	6 155	YB16-B-CX, YB16-B, Y60-N24-A (56), YB16C-B
ETX16L	2,38,39,42,74,77	275	19	17.0 7.7	6 175	4	100	6 155	YB16HL-A-CX, YB16L-B, 12N16-3B, Y60-N24AL-B (56), YB16CL-B, 12N24-3 (56), 12N24-3A (56)
ETX18L	2,38,39,77	330	20	18.0 8.2	8 206	3 76	91	6 163	Y50-N18L-A-CX, Y50-N18L-A-LM, Y50-N18L-A, Y50-N18L-A3, SY50-N18L-A1 (65)
ETX20L	2,38,39,77	270	17.5	15.5 7.0	6 177	3 76	88	6 155	YTX20L-BS, YB18L-A (56)
ETX30L	2,38,39,77	365	26	21.7 9.8	6 168	5 131	6 176		Y1X30L, YB30L-B, YB30CL-B (56)
ETX30LA	2,38,39,77,78	365	26	21.7 9.8	6 168	5 131	7 197		YB30CL-B

FOOTNOTES: 2 – Black cover / Gray case.
38 – "Non-spillable" defined by DOT (Department of Transportation) definitions
39 – "Non-spillable" defined by ICAO (International Commercial Airline Organization) and IATA (International Airline Transport Association) definitions
42 – Height without adapter
56 – Hold-down modification may be required

65 – Includes sensor not supplied with AGM
74 – Shipped with 20mm adapter
75 – Shipped with two (2) 17mm adapters
76 – Shipped with 10mm adapter
77 – Does not meet Harley-Davidson OEM specifications
78 – Shipped with 22mm height adapter

"POWERED FOR PERFORMANCE"®

DISTRIBUTED BY:

EAST PENN manufacturing co., inc.

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

www.dekabatteries.com • e-mail: eastpenn@eastpenn-deka.com

E.P.M. Form No. 0278 Rev. 9/08 © 2008 by EPM Printed in U.S.A.

All data subject to change without notice.
No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.